



BRICK BY BRICK

page 1



Instructions

1/4" seam allowance is included

Print Fabrics


1. Cut 15 print strips 2 1/2" X the width of the fabric. (Or use 15 jelly roll strips)

Background Fabric

1. Cut thirty strips 2 1/2" X the width of the fabric.


Blocks

- 1. With right sides together sew two background strips to each print strip. Refer to diagram #1. Press seams open.
- 2. Cut each strip set into six 6 1/2" lengths. Refer to diagram #2. You will need 90 6 1/2" X 6 1/2" blocks.

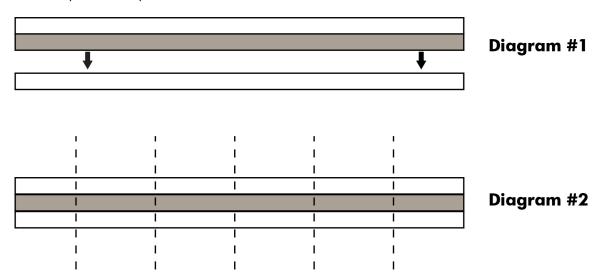

Rows

- 1. With right sides together sew nine blocks together alternating the direction of each block for one row. Refer to diagram #3.
- 2. Repeat step 1 to make ten rows. Be sure to alternate the direction of the first block on every other row.
- 3. With right sides together sew the rows together. Refer to diagram 4. Press seams open.










Backing & Batting

- 1. Piece backing to measure 62" x 68".
- 2. Cut batting to measure 62" x 68".
- 3. With wrong sides together layer the backing, batting and quilt top.
- 4. Quilt as desired.
- 5. Trim away excess backing and batting.


Binding

- 1. Cut seven strips $2 \frac{1}{4}$ " x the width of the fabric.
- 2. With right sides together piece the ends together to make one long strip.
- 3. With wrong sides together fold the strip in half lengthwise and press.
- 4. Sew to the top of the quilt matching the raw edges and mitering the corners. Refer to diagram #5 for mitering.
- 5. Turn the folded edge to the back and hand stitch in place.

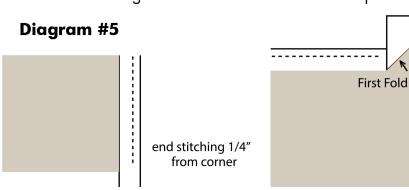

Step 1 - Stitch to 1/4" from corner

Step 2 - First fold for miter



Step 3 - Second Fold Alignment